


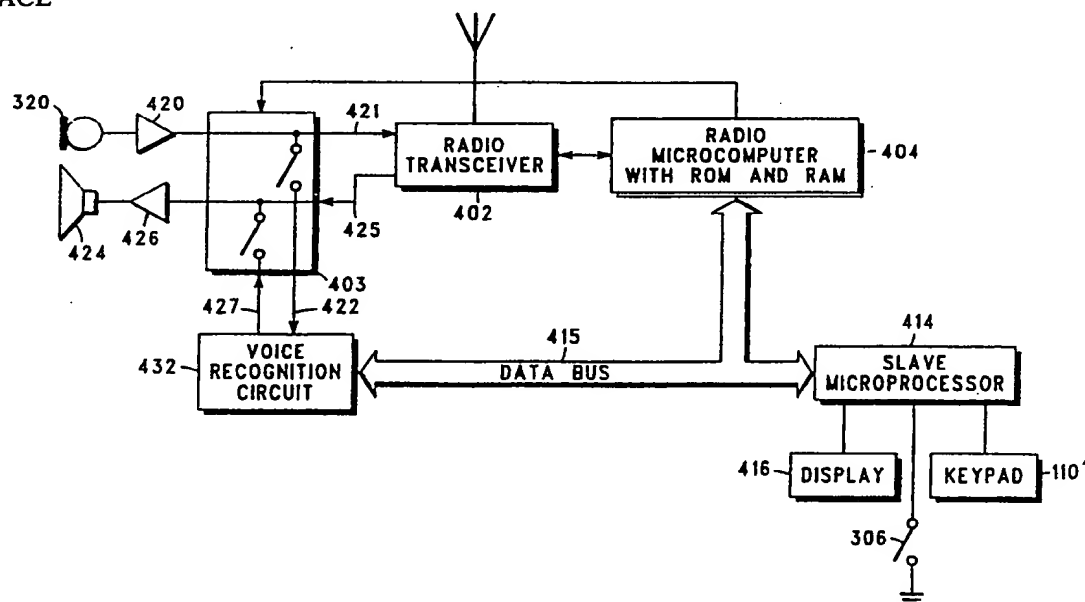

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04M 11/00	A1	(11) International Publication Number: WO 91/07835 (43) International Publication Date: 30 May 1991 (30.05.91)
--	-----------	---

(21) International Application Number: **PCT/US90/06222**(22) International Filing Date: **1 November 1990 (01.11.90)**(30) Priority data:
439,993 **20 November 1989 (20.11.89)** **US**(71) Applicant: **MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).**(72) Inventors: **METROKA, Michael, P. ; 730 Oakview Drive, Algonquin, IL 60102 (US). KROLOPP, Robert, K. ; 6466 Cape Cod Court, Lisle, IL 60532 (US).**(74) Agents: **PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).**(81) Designated States: **AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), LU (European patent), NL (European patent), SE (European patent).****Published**
With international search report.(54) Title: **COMMUNICATIONS DEVICE WITH VOICE RECOGNITION AND MOVABLE ELEMENT CONTROL INTERFACE**

(57) Abstract

A portable radiotelephone with an integral voice recognition circuit is disclosed. Control of the voice recognition circuit is achieved with a foldable housing element (104) which, in a closed position, covers an external keypad (110) and control buttons. When the foldable housing element (104) is in an open position, the portable radiotelephone is placed in an off-hook condition, the voice recognition circuit (432) is activated, and the acoustic transducers (320, 424) are coupled to the voice recognition circuit (432). When the foldable element (104) is in a closed position, the portable radiotelephone is placed in an on-hook condition, the voice recognition circuit (432) is deactivated, and the electroacoustic transducers (320, 424) are coupled to the radiotelephone. A rapid closing and opening of the foldable element (104) results in the voice recognition circuit (432) being deactivated while the portable radiotelephone remains in the off-hook condition.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

-1-

5 COMMUNICATIONS DEVICE WITH VOICE RECOGNITION
AND MOVABLE ELEMENT CONTROL INTERFACE

Background of the Invention

10 The present invention is generally related to a portable
telephone apparatus, and more particularly to a cellular portable
radiotelephone utilizing a movable housing element to permit
the user to answer and terminate telephone calls and control
various radiotelephone functions by opening or closing the
movable element. This invention is related to that disclosed and
15 claimed in U.S. Patent Application No. 439,983 filed in behalf of
Metroka et al. on November 20, 1989.

Telephones having a rotary or pushbutton dial mechanism
and other buttons integral to the handset portion have become
commonplace in landline subscriber telephone instruments.
20 This integral arrangement offers the telephone user the
convenience of bringing the user interface mechanism and
control buttons close to the user.

Radiotelephone operation, such as that offered in cellular
radiotelephone or in cordless telephone sets, provide a mobility to
25 the telephone user which landline telephone does not provide.
The absence of a cord and the small size of the portable
radiotelephone unit enables the user to carry the unit essentially
wherever the user goes. Recent innovations have enabled voice
recognition circuitry to be used with portable radiotelephones in
30 order to provide the user the ability to dial and control the
operation of a portable radiotelephone with the spoken voice.
Undesired operation of voice recognition circuitry in a
radiotelephone setting, however, may turn the equipment on or
off, cause transmission of unwanted signals and prevent use of a
35 radio channel, or cause undesired functions to occur. Such

undesired activation of voice recognition is likely to engage functions which reduce the operating life of the battery which powers the portable radiotelephone.

5 Additional drain upon the battery of the radiotelephone is made by the apparatus providing illumination for the dial keypad and number display. Previously, in order to activate the portable telephone's display or backlighting, the user would have to press a button which would initiate a function, digit, etc. The user
10 would then have to press a clear button to delete this function or digit. Such an operation provides an unwanted opportunity for error and may, for example, have enabled the user to inadvertently erase the contents of the scratch pad memory used for dialing a call. A user, having experienced an undesired
15 operation caused by an inappropriate press of a clear button, quickly becomes discouraged from using the otherwise useful illumination feature.

Summary of the Invention

20

The present invention overcomes these problems by using the hookswitch in the movable flip element to activate and deactivate the voice recognition circuit.

25 Accordingly, it is one object of the present invention to provide a portable radiotelephone which uses a movable flip element to place the portable radiotelephone in an on-hook or an off-hook condition.

30 It is another object of the present invention to provide a portable radiotelephone, which uses a movable flip element to enable and disable the voice recognition circuit.

It is a further object of the present invention to provide a portable radiotelephone which deactivates the voice recognition circuitry while maintaining a telephone call when the flip element is briefly closed then opened.

It is a further object of the present invention to utilize noise cancelling for a flip element microphone to enhance the performance of a voice recognition circuit.

5

Brief Description of the Drawings

Figure 1 is an isometric drawing of a portable radiotelephone which may employ the present invention.

10 Figure 2 is a side view of the portable radiotelephone of Fig. 1 depicting operation of the movable flip element.

Figure 3A is a bottom plan view of the portable radiotelephone of Fig. 1, illustrating the noise cancelling port.

15 Figure 3B is a cross-section of the flip element of the portable radiotelephone of Fig. 1, illustrates a noise cancelling microphone disposed therein.

Figure 3C is a diagram of the hookswitch switch mechanism which may be employed in the radiotelephone of Fig. 1.

20 Figure 4 is a block diagram of the electronic elements of a portable radiotelephone embodying the present invention.

Figure 5 is a schematic diagram of the slave microprocessor and associated circuitry employed in the portable radiotelephone of Fig. 4.

25 Figure 6 is a block diagram of the voice recognition circuitry which may be employed in the portable radiotelephone of Fig. 4.

Figures 7A and 7B are a flowchart depicting the process of hookswitch operation of the slave microprocessor.

30 Figures 8A and 8B are a flowchart depicting a process of interpreting hookswitch operation of the master microprocessor.

Detailed Description of the Preferred Embodiment

5 A portable radiotelephone adapted to be used in a cellular
radiotelephone system is shown in Figure 1. This portable unit
consists of two readily apparent portions, a body portion 102 and a
flip element portion 104. The drawing of Fig. 1 shows the flip
element portion 104. The drawing of Fig. 1 shows the flip element
104 in an "open" position such that a user of the portable unit
10 may listen via earpiece 106 and may speak into the microphone
port 107. The dial or keypad 110 consists of a plurality of buttons
numbered one through zero, #, and *, in a familiar telephone
arrangement as well as additional function buttons such as
"send", "end", "clear", "on-off", and other buttons associated
15 with memory recall. Volume control buttons (not shown) may
adjust the volume of the earpiece and/or the ringer. Operation of
such a portable radiotelephone and flip element has been
described in U.S. Patent No. 4,845,772, assigned to the assignee of
the present invention.

20 When the flip element 104 is open as shown in Fig. 1, the
portable cellular telephone can be in the state of answering or
making a telephone call. Such a state is commonly known as
"off-hook". (It should be noted that in a cellular preorigination
dialing system an additional operator activity is required to place
25 a call: upon entering a telephone number to be dialed either via
the keypad 110 or by recognition of digits or names by a voice
recognition circuit, the send button must be depressed in order to
activate the portable unit's transmitter and to complete the call.
In the preferred embodiment, the send button may also be
30 electronically activated by the voice recognition circuit and can be
used to answer a call if the flip element is already open). Upon
completion of the telephone call, the user may hang up the
portable telephone (go "on-hook") by moving the flip element 104
into a stowed position, that is, rotated about the axis of hinges 112

and 114 so that the flip element 104 rests nearly against keypad 110. This action activates a hookswitch (HKS) which causes the telephone call to be terminated. Depression of the end button or
5 an equivalent operation by the voice recognition circuit without closing the flip element may also terminate the call.

Activation of the hookswitch occurs in the preferred embodiment when the angle between the body 102 and the flip element 104 equals approximately 45°. The closing of the flip
10 element 104 can best be perceived in Fig. 2. The hookswitch in the preferred embodiment is located between the flip element 104 and the body portion 102 and may be seen in the detail of Fig. 3C. A contact 302 consisting of a conventional conductive spring material is disposed in hinge 114 of flip element 104 and rotates
15 with the flip element 104. A printed circuit board element 304 is disposed in the body portion 102 in a position such that the contact 302 presses against the circuit board element 304. Metallization disposed on printed circuit board element 304 is positioned such that when the flip element 104 is opened to an angle of 45°, an
20 electrical connection is completed between the metallization through the contact 302 to ground. In the preferred embodiment, the combination of the contact 302 and the printed circuit board element 304 is the hookswitch (HKS) 306.

The portable radiotelephone, when viewed in bottom plan
25 in Fig. 3A, shows the acoustic port 318 in the housing of flip element 104 which enables ambient noise to enter and be presented to a noise cancelling microphone element. A noise cancelling microphone element 320 is illustrated in the cross section of the flip element 104 shown in Fig. 3B. Speech acoustic
30 energy preferentially enters the acoustic port 107 disposed on the inside surface (the surface closest to the user's mouth when the flip element 104 is in the open position) of flip element 104. Ambient noise enters both acoustic port 107 and acoustic port 318 and is accepted by microphone element 320 in a manner which

conventionally results in the cancellation of ambient noise. Such noise cancelling operation is briefly described in Application Note BW-1789 from Knowles Electronics, Inc. (dated 5/1/74). In the preferred embodiment, microphone element 320 is a model WM-55D103 microphone available from Matsushita Communications Industrial Co., Ltd., Yokohama, Japan.

Referring to Figure 4, there is illustrated an electrical block diagram of a cellular portable radiotelephone embodying the present invention. Such a portable radiotelephone includes a cellular radiotelephone transceiver 402 operable in cellular radiotelephone systems, internal microphone 320 and speaker 424, which are switchably coupled to the radio transceiver 402 and a voice recognition circuit 432 by a conventional controlled switch circuit 403, radio microcomputer 404 with conventional RAM (storing pertinent cellular telephone call parameters) and conventional ROM (storing control software), a slave microcomputer 414 including conventional ROM with control software for controlling display 416 and keypad 110', and the voice recognition circuit 432. The radio microcomputer 404, slave microcomputer 414, and voice recognition circuit 432, are coupled to and communicate with one another by way of a three-wire data bus 415, which operates as described in U.S. Patent Nos. 4,369,516 and 4,616,314 (incorporated herein by reference). The foregoing transceiver and microcomputer blocks may be conventional blocks of commercially available portable radiotelephones, such as, for example, the "MICROTAC PT" Cellular Telephone available from Motorola, Inc. The "MICROTAC PT" Cellular Telephone is described in further detail in operators manual no. 68P81150E49, published by and available from Motorola C & E Parts, 1313 East Algonquin Road, Schaumburg, Illinois 60196.

Audio signals are converted into electrical signals by internal microphone 320 and are coupled by amplifier 420 and switch circuit 403 to the radio transceiver 402 via conductor 421.

These signals are then used to modulate the transmitter of transceiver 402 in conventional fashion. Likewise, signals received by the receiver of transceiver 402 are coupled via
5 conductor 425 to switch circuit 403, audio amplifier 426 and subsequently to a speaker 424 for conversion to acoustic signals.

When the portable radiotelephone is in the voice recognition mode, the signals from microphone 320 are coupled to voice recognition circuit 432 by switch circuit 403 via conductor
10 422. Audio signals generated by the voice recognition circuit 432 are coupled via conductor 427 to switch circuit 403 for connection to amplifier 426 and speaker 424.

In the preferred embodiment, two interconnected microcomputer systems are utilized to control the basic functions
15 of the portable radiotelephone (the radio microcomputer 404) and to control the keypad and display functions (the slave microcomputer 414). The slave microcomputer 414 is shown in more detail in the schematic of Fig. 5. The slave microcomputer 414 consists of a microprocessor 502 which, in the preferred
20 embodiment, is an MC68HC05C4 microprocessor (which also has on-board memory). The basic function of the slave microprocessor is to provide interface to the user of the portable radiotelephone via keypad 110', display 416, and other buttons, indicators, and illumination backlighting. The slave
25 microprocessor 502 is coupled to a multi-segment display 416 which, in the preferred embodiment, is a conventional LED eight digit display. The slave microprocessor 502 is also coupled to a keypad matrix of buttons 110' which enables the portable radiotelephone user to input (dial) telephone numbers, store and
30 recall telephone number information, and perform other radiotelephone functions (such as initiate a telephone call). In the preferred embodiment, one of the keys, 508, of the matrix 110' is specially dedicated to the function of turning the power on and off. Power on/off is accomplished by a momentary switch closure

(by key 508) to ground which activates on/off circuitry. Volume increase switch 509 and volume decrease switch 511 are electrically coupled to the slave microprocessor 502 as part of the row/column matrix. Their physical location is away from the keypad 110' to allow for greater user convenience.

The function which is normally performed by a hookswitch (HKS) in a conventional landline telephone is performed in the portable radiotelephone of the present invention as previously described in relation to Fig. 3C. The hookswitch is shown schematically as switch 306 in Fig. 5. A DC (Direct Current) circuit is made or broken by HKS 306 to ground and applied to microprocessor 502. Furthermore, a pulse is generated from any change of state of the HKS 306 by a transistor 510 capacitors 512 and 514 and resistors 516, 518, and 519. The output of transistor 510 is taken from the collector and applied to the interrupt request (IRQ) input and the keypad column inputs of microprocessor 502 having a negative duration of approximately 10 microseconds. Microprocessor 502 stores the status of HKS 306 and provides an indication of the change of state of HKS 306 to the radio microprocessor 404.

Communication between the slave microprocessor 502 and the radio microprocessor 404 is maintained on a data bus 415. This data bus 415 is coupled to the radio microprocessor 404 as shown in Fig. 4. Another function which also shares the data bus 415 is the voice recognition circuit 432.

Assuming that the portable radiotelephone has been powered-up and the flip element has been opened to enable the HKS, a keypad 110' pushbutton activation by the portable radiotelephone user results in a communication between the slave microprocessor 502 and the radio microcomputer 404 via the bus 415. The slave microprocessor 502, in the preferred embodiment, communicates that a closure has occurred between a particular row and a particular column corresponding to the

key pressed by the user. The radio microcomputer 404 may then take the appropriate action, such as returning a digit instruction via bus 415 for the slave microprocessor 502 to cause the display
5 416 to illuminate or otherwise display a character. Thus, the slave microprocessor 502 is commanded by the radio microcomputer 404 or the user in order to complete an assignment.

Referring now to Fig. 6, there is illustrated a block
10 diagram of a voice recognition circuit 432 which may be utilized in the present invention. When the voice recognition circuits are activated, microphone audio from a microphone is input via conductor 422 to amplifier 610 where the gain is increased to an appropriate input level for the A/D converter 612. The A/D
15 converter 612 digitizes the amplified analog input signal from amplifier 610. The digitized signal from A/D converter 612 is fed to a filter bank 614 comprised of 'n' bandpass filters whose responses overlap at the 3dB response points. The output from each of the filter bank channels is fed to an 'n' channel energy
20 detector 616 where the amplitude of the signal in each bandpass response is detected. The detected level from each energy detector, at 616, is fed to conventional microprocessor 618 for comparison with a stored energy template from memory 620. Upon successful correlation of the microphone input signal with
25 the stored template, microprocessor 618 sends an appropriate command on the data bus 415 to the radio microprocessor 404. In this manner, a spoken command such as a telephone number to be dialed or a "send" or "end" command may be entered to control radiotelephone operation. Synthesized voice replies from the
30 voice recognition circuits are initiated by microprocessor 618 by sending control signals to a random noise generator and pitch generator circuit 622. Signals from these generators are fed to an 'n' channel filter bank 624 which comprises 'n' narrow bandpass filters. The output of these filters are added together in a

summer block 626 whose output is then fed to a D/A converter 628 where the digital signal is converted to an analog signal. This analog signal is amplified to an appropriate level with amplifier 5 630 and output via conductor 427 for connection to amplifier 426 and speaker 424 so that the user will hear the synthesized voice responses. The voice recognition circuit is activated and deactivated by the radio microprocessor 404 by sending commands to the voice recognition microprocessor 618 over the 10 data bus 415. Similar voice recognition circuits are further disclosed in U.S. Patent nos. 4,797,929; 4,817,157; and 4,870,686, U.S. Patent Applicant nos. 266,293 ("Word Spotting in a Speech Recognition System Without Predetermined Endpoint Detection" filed on behalf of Gerson on October 31, 1988), 294,098 ("Digital 15 Speech Coder Having Improved Vector Excitation Source" filed on behalf of Gerson on January 6, 1989), and 399341 ("Method for Terminating a Telephone Call by Voice Command" filed on behalf of Gerson et al. on August 25, 1989); and International Publication Nos. WO/87/07748 and WO 87/07749 (December 17, 20 1987). The use of a similar voice recognition circuit with a cellular radiotelephone is described in Motorola, Inc. User's Manual 68P81121E82-O "Digital Voice Caller", September, 1988.

Illumination for the keypad 110 is provided, in the preferred embodiment, by a plurality of light emitting diodes 25 (LEDs) indicated by diodes 536-541 in Fig. 5. LEDs 536-541 are conventionally supplied from battery + via current limiting resistors and switch transistor 543. Switch transistor 543 is coupled to the TCMP port of slave microprocessor 502 and is enabled/disabled in accordance with the stored program of slave 30 microprocessor 502. The LEDs are physically mounted behind the keypad 110 shown in Fig. 1 and provide a backlighting to the keys to aid the user in selecting keys in dim lighting conditions.

Although the preferred embodiment has been implemented employing three microprocessors, this should not be a limitation of the invention for it is possible to implement the present invention in a single microprocessor should the designer
5 so desire. For either a single microprocessor or a multiple microprocessor system, the microprocessors may be interrupt driven in order to save battery power.

The process of Fig. 7A, therefore, commences with an
10 interrupt due to a change of state of the hookswitch 306 to enable the microcomputer system at 702. A determination is made, at 704, whether the flip element is open or closed. If the flip element is open, then the keypad 110 is read to determine which key has been closed at 706. If a key has been depressed, at 708, then the
15 function or character designated by the key is acted upon at 710. If a keypad 110 key has not been depressed, then no action is taken and the microcomputer system resumes its normal functions of controlling the transceiver, the display, and other housekeeping chores as shown at 712. If it is determined that the
20 flip element is not open (at 704), then any keypad key depression is considered to be spurious and is ignored by progressing directly from the determination block at 704 to the normal housekeeping functions block at 712. The entire process is repeated for a predetermined period of time until a determination
25 is made that the microcomputer system should go into a low power consumption mode as determined at 714. The microcomputer system is put into a "sleep" state at 716 and only the low power functions await for an interrupt signal at 718.

If the microcomputer system is implemented as a radio
30 microcomputer and a slave microcomputer, the slave microprocessor 502 can send either a flip element closed indication or a flip open indication to the radio microcomputer, a detection of those indications is necessary by the radio microcomputer.

The slave microprocessor 502 determines, as part of its routine of chores, whether the hookswitch has changed state by comparing the current state against the stored state at 722 and 724 of Fig. 7B. If the state is different, then a determination is made, at 726, whether the flip element is open or closed. If the flip element is determined to be open, then an open flip element command is transmitted to the radio microcomputer at 728 and the slave microprocessor returns to its normal background functions at 732. If the determination at 726 yields a closed flip element, then a closed flip element command is conveyed to the radio microcomputer at 730 and the slave microprocessor returns to its normal background functions at 732. In either case the radio microcomputer 404 maintains the flip element state in its associated storage and the slave microprocessor 502, as part of its routine of chores, checks for a keypad enable or a keypad disable command received from the radio microcomputer 404. Thus, if the flip element is determined to be open, then the keys of the keypad are read in conventional fashion. If the flip element is determined to be closed, then the keys of the keypad are ignored.

The process followed by the radio microcomputer 404 in realizing the present invention in the preferred embodiment is shown in Figures 8A and 8B. The radio microprocessor 404, as part of its routine of chores, at 802, checks for a on-hook to off-hook transition at 804. If an on-hook to off-hook transition has not occurred then flow proceeds to determination block 806 where a test is made to determine if an off-hook to on-hook transition has occurred. If none has occurred, then flow returns to the normal background functions at 802. If it is determined that an off-hook to on-hook transition has occurred at 806 indicating that the movable element 104 is in the closed position, then flow proceeds to determination block 808 where a test is made to determine if a telephone call is presently in progress. If it is determined that a call is not presently in progress, then flow proceeds to 810 where

the voice recognition circuitry is disabled, the backlighting is inactivated, and the display is inactivated. Thus, if the movable flip element 104 is closed while a call is not in progress, then the voice recognition circuitry, the backlighting, and the display are inactivated. Optionally, the display may remain activated for a period of six seconds before being deactivated by such a off-hook to on-hook transition. From 810, flow returns to the normal background functions at 802. If a determination is made that a call is in progress, at 808, then flow proceeds to determination block 812. A test is made, at 812, of whether the microphone mute function is on. If the microphone is muted, then flow proceeds to 814 where the voice recognition circuitry is disabled. Thus, when the movable element 104 is closed while a call is in progress and the microphone is muted, the voice recognition circuitry is disabled. Flow proceeds from block 814 to 802 where flow returns to the normal background functions. If it is determined, at 812, that the microphone is not muted, then flow proceeds to block 816 where a timer of 'n' milliseconds is started. This timer runs until it has either expired or the movable flip element is re-opened. After the counter is started, flow proceeds to determination block 818 where a test is made to determine whether the timer has expired. If the timer has expired then the flow proceeds to block 820 where the telephone call is terminated. Thus, if the movable element is closed for longer than 'n' milliseconds while a call is in progress and the microphone is not muted, then the call is terminated. In the preferred embodiment, the timer duration 'n' is 1000 milliseconds. Flow proceeds from block 820 to 802 where flow returns to the normal background functions. If it is determined, at 818, that the timer has not expired, then flow proceeds to determination block 822 where a test is made of whether an on-hook to off-hook transition has occurred. If no on-hook to off-hook transition has occurred, then flow returns to determination block 818. Flow continues in

the 818-822 loop until either the timer expires or an on-hook to off-hook transition occurs. If a determination is made, at 822, that an on-hook to off-hook transition has occurred prior to the timer
5 expiring, then flow proceeds to determination block 824. A determination is made at decision block 824 whether the voice recognition circuit has been enabled. If the voice recognition circuit has been enabled, it is then disabled, at block 825, before the process returns to the normal background functions at 802. If
10 the voice recognition circuit is not enabled at this time, then the process proceeds to block 826 where a hookswitch flash signal is sent. Thus, if the telephone is presently engaged in a call with the microphone not muted and the movable flip element 104 is momentarily closed and then re-opened prior to the timer
15 expiring, then either the voice recognition circuit is disabled or a hookswitch flash signal is sent. From 826, flow returns to the normal background functions at 802.

If it is determined, at 804, that an on-hook to off-hook transition occurred then the flow proceeds to block 834 where the
20 voice recognition circuitry is activated. The process, then, at 835, activates the keypad backlighting illumination and the display 416 for a conventionally timed period of six seconds. Thus, if the master microcomputer is performing normal background functions and an on-hook to off-hook transition occurs, then the
25 voice recognition circuitry is activated, the keypad backlighting is activated, the display is activated. The flow continues to determination block 836. A test is made, at 836, to determine whether the microphone mute function is on. If it was determined, at 836, that the microphone is muted, then flow
30 proceeds to block 838 where the microphone is unmuted. Thus if the microphone is in the muted state with the movable element closed, opening the movable element will unmute the microphone, from 838 flow returns to the normal background functions at 802.

If it is determined, at 836, that the microphone is not muted, then flow proceeds to determination block 840. A test is made, at 840, to determine whether the portable radiotelephone is currently ringing. If it is determined, at 840, that the portable radiotelephone is not ringing, indicating that there is no incoming call, then the process flow returns to the normal background functions at 802. If it is determined, at 840, that the radiotelephone is ringing, then the process flow proceeds to block 842 where the incoming call is answered. Thus, if the telephone is ringing while the movable flip element 104 is closed and the movable element 104 is then opened, the incoming call is answered. From 842, flow returns to the normal background functions at 802.

Thus, then, a portable radiotelephone having the capability of enabling and disabling voice recognition circuitry in response to the position of a flip element has been shown and described. The flip element, which covers a keypad and other control buttons when in a closed position, produces an off-hook condition via a hookswitch when moved to an open position. While a particular embodiment of the invention has been shown and described, it is to be understood that the invention is not to be taken as limited to the specific embodiment herein, and that changes and modifications may be made without departing from the true spirit of the invention. It is contemplated therefore to cover the present invention, and any and all such changes and modifications, by the appended claims.

We claim:

Claims

1. A portable radiotelephone apparatus having an
5 integral radio transceiver and voice recognition circuit, the
radiotelephone apparatus comprising:
an acoustic to electric transducer switchably coupled to the
radio transceiver and voice recognition circuit;
means for producing an off-hook signal; and
10 means, responsive to said off hook signal, for activating the
voice recognition circuit and for coupling said acoustic to electric
transducer to the voice recognition circuit.

2. A portable radiotelephone apparatus in accordance with claim 1 further comprising an electric to acoustic transducer switchably coupled to the radio transceiver and voice
5 recognition circuit.

3. A portable radiotelephone apparatus in accordance with claim 2 wherein said means for activating the voice recognition circuit further comprises means for coupling said
10 electric to acoustic transducer to the voice recognition circuit.

4. A portable radiotelephone apparatus in accordance with claim 1 further comprising a housing having a fixed member and a movable member, said movable member having a
15 retracted first position and an extended second position.

5. A portable radiotelephone apparatus in accordance with claim 4 wherein said means for producing an off-hook condition and for activating the voice recognition circuit further
20 comprises means for producing an off-hook condition in the portable radiotelephone apparatus when the movable member is in said second position.

6. A portable radiotelephone apparatus in accordance with claim 4 wherein said means for producing an off-hook
25 signal further comprises means for producing said on-hook signal in the portable radiotelephone apparatus when said movable member is in said first position.

7. A portable radiotelephone apparatus in accordance with claim 1 wherein said acoustic to electric transducer further
30 comprises a noise cancelling microphone.

8. A portable radiotelephone apparatus having a voice recognition circuit and further having a housing with a movable member having a microphone disposed therein and a fixed member having an earpiece electroacoustic transducer disposed therein, the movable member having a contracted first position and an extended second position, the portable radiotelephone apparatus comprising:
- means for producing an off-hook signal in the portable radiotelephone apparatus when the movable member is in the second position;
- means for activating the voice recognition circuit when the movable member is in the second position; and
- means for producing an on-hook signal in the portable radiotelephone apparatus if the movable member is in the first position.

9. A portable radiotelephone apparatus in accordance with claim 8 further comprising means for deactivating an activated voice recognition circuit when the movable member is in the first position.

10. A portable radiotelephone apparatus in accordance with claim 8 further comprising means for initiating a telephone call after said off-hook signal has been produced.

11. A portable radiotelephone apparatus in accordance with claim 10 further comprising means for deactivating an activated voice recognition circuit but maintaining said telephone call when the movable member is placed in the first position and subsequently returned to the second position within a predetermined period of time .

12. A method of control of a voice recognition circuit in a portable radiotelephone apparatus having a keypad disposed on an outer surface and a movable member which covers the keypad when the movable member is placed in a first position and which
5 exposes the keypad when the movable member is placed in a second position, comprising the steps of:

- producing an off-hook signal in the portable radiotelephone apparatus if the movable member is in the second position;
- 10 activating the voice recognition circuit when the movable member is in the second position; and
- producing an on-hook condition in the portable radiotelephone apparatus if the movable member is in the first position.

13. A method in accordance with the method of claim 12
further comprising the step of deactivating an activated voice
recognition circuit when the movable member is placed in the
5 first position.

14. A method in accordance with the method of claim 12
further comprising the step of initiating a telephone call after
said off-hook condition has been produced.
10

15. A method in accordance with the method of claim 14
further comprising the step of deactivating an activated voice
recognition circuit but maintaining said initiated telephone call
when the movable member is placed in the first position and
15 subsequently returned to the second position within a
predetermined period of time.

1 / 8

FIG. 1

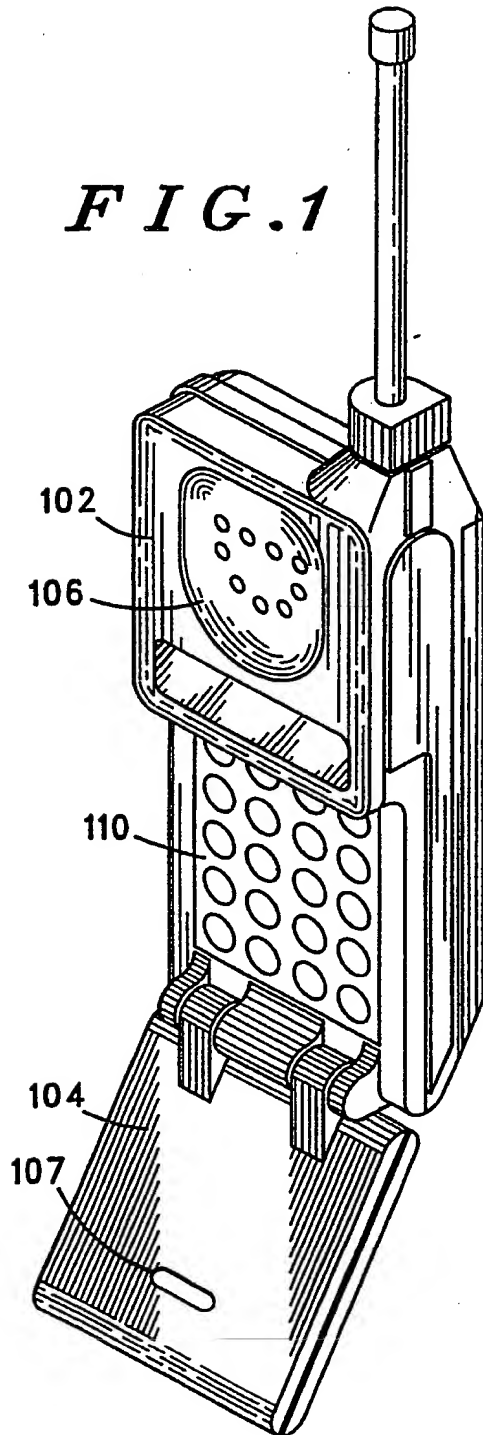


FIG. 2

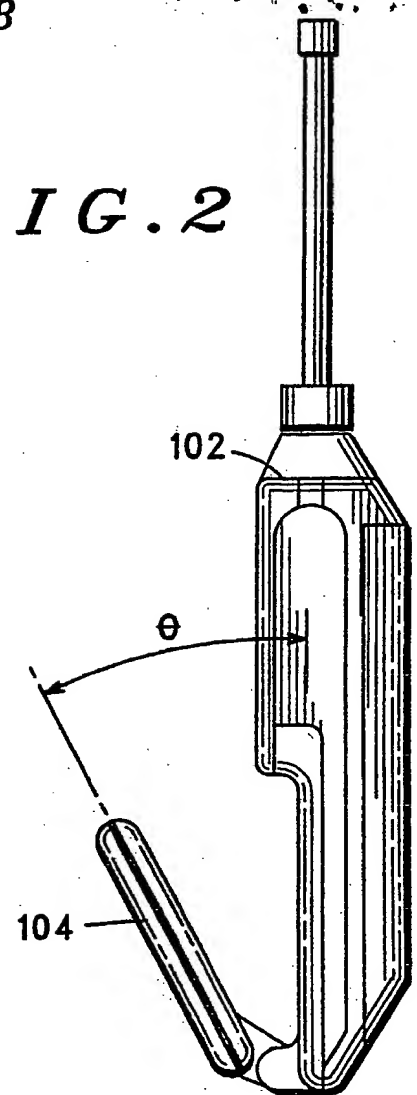
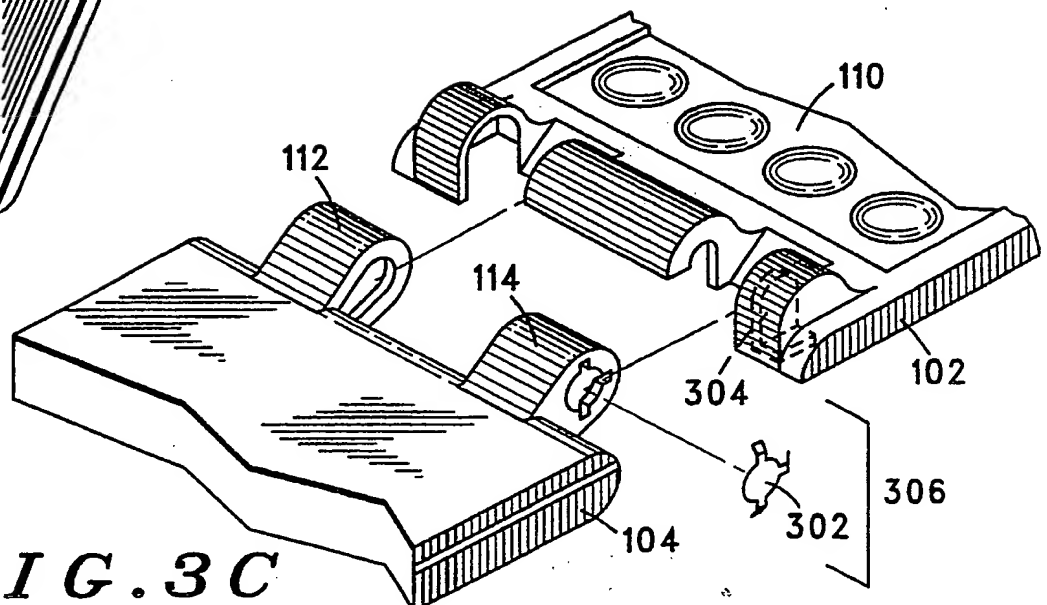


FIG. 3C



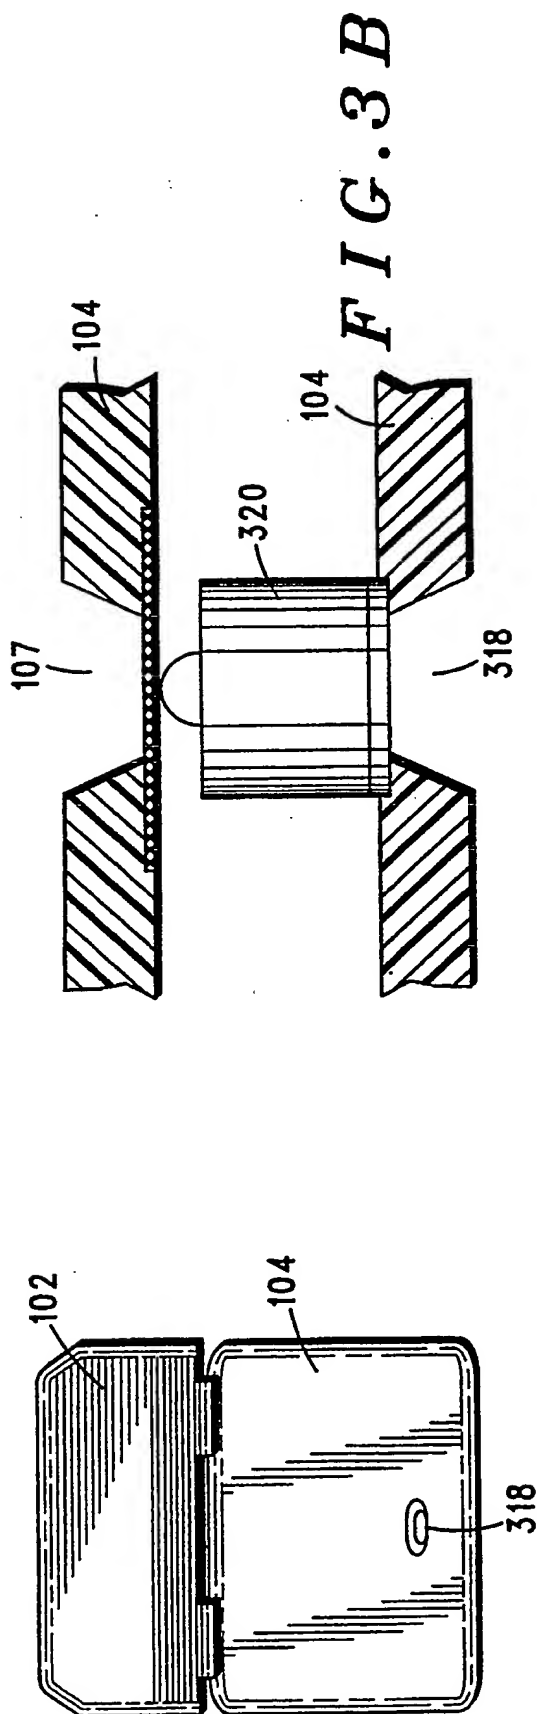


FIG. 3A

FIG. 3B

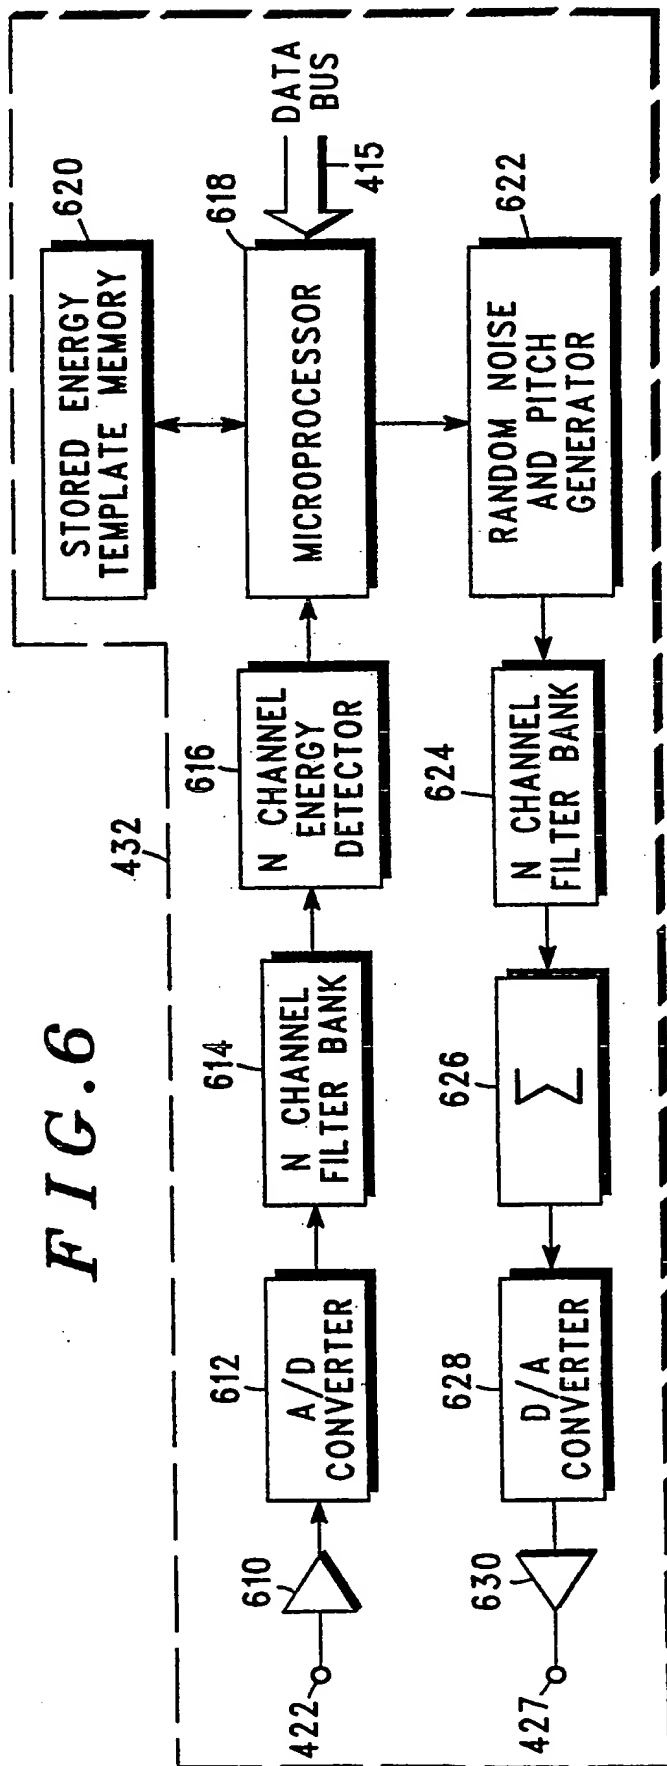


FIG. 6

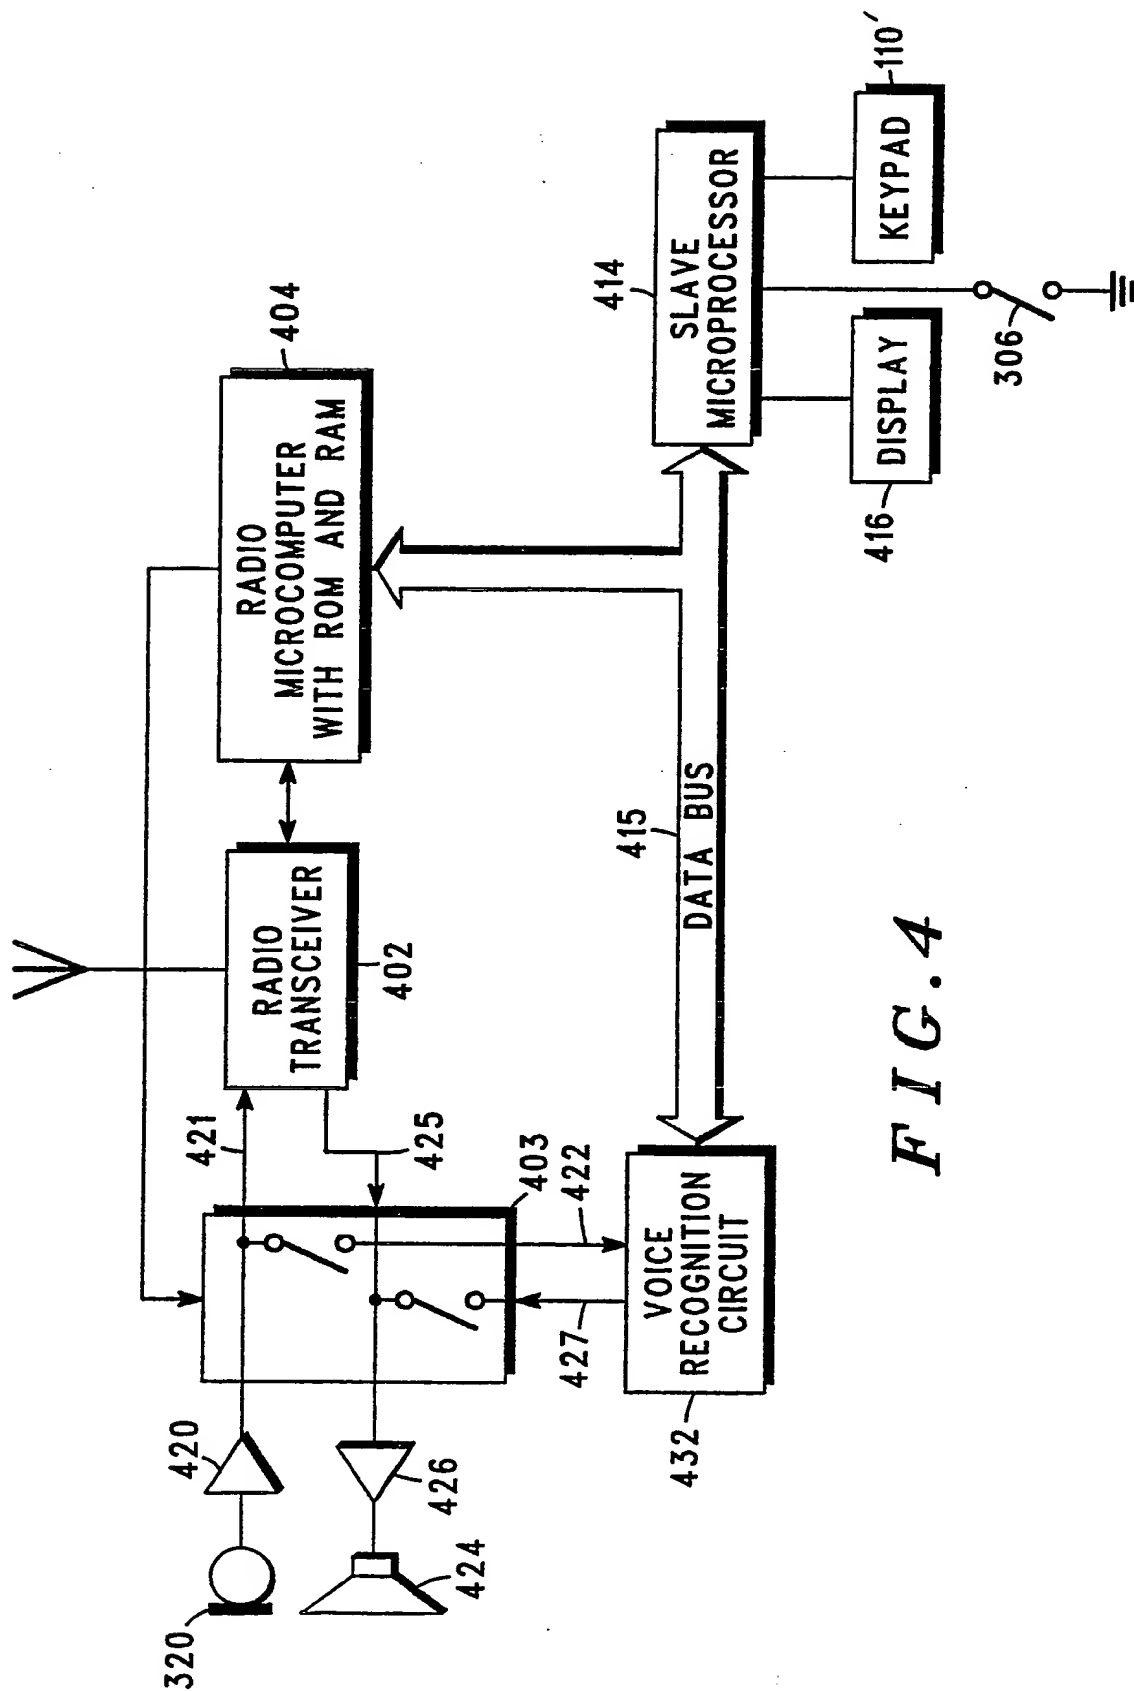


FIG. 4

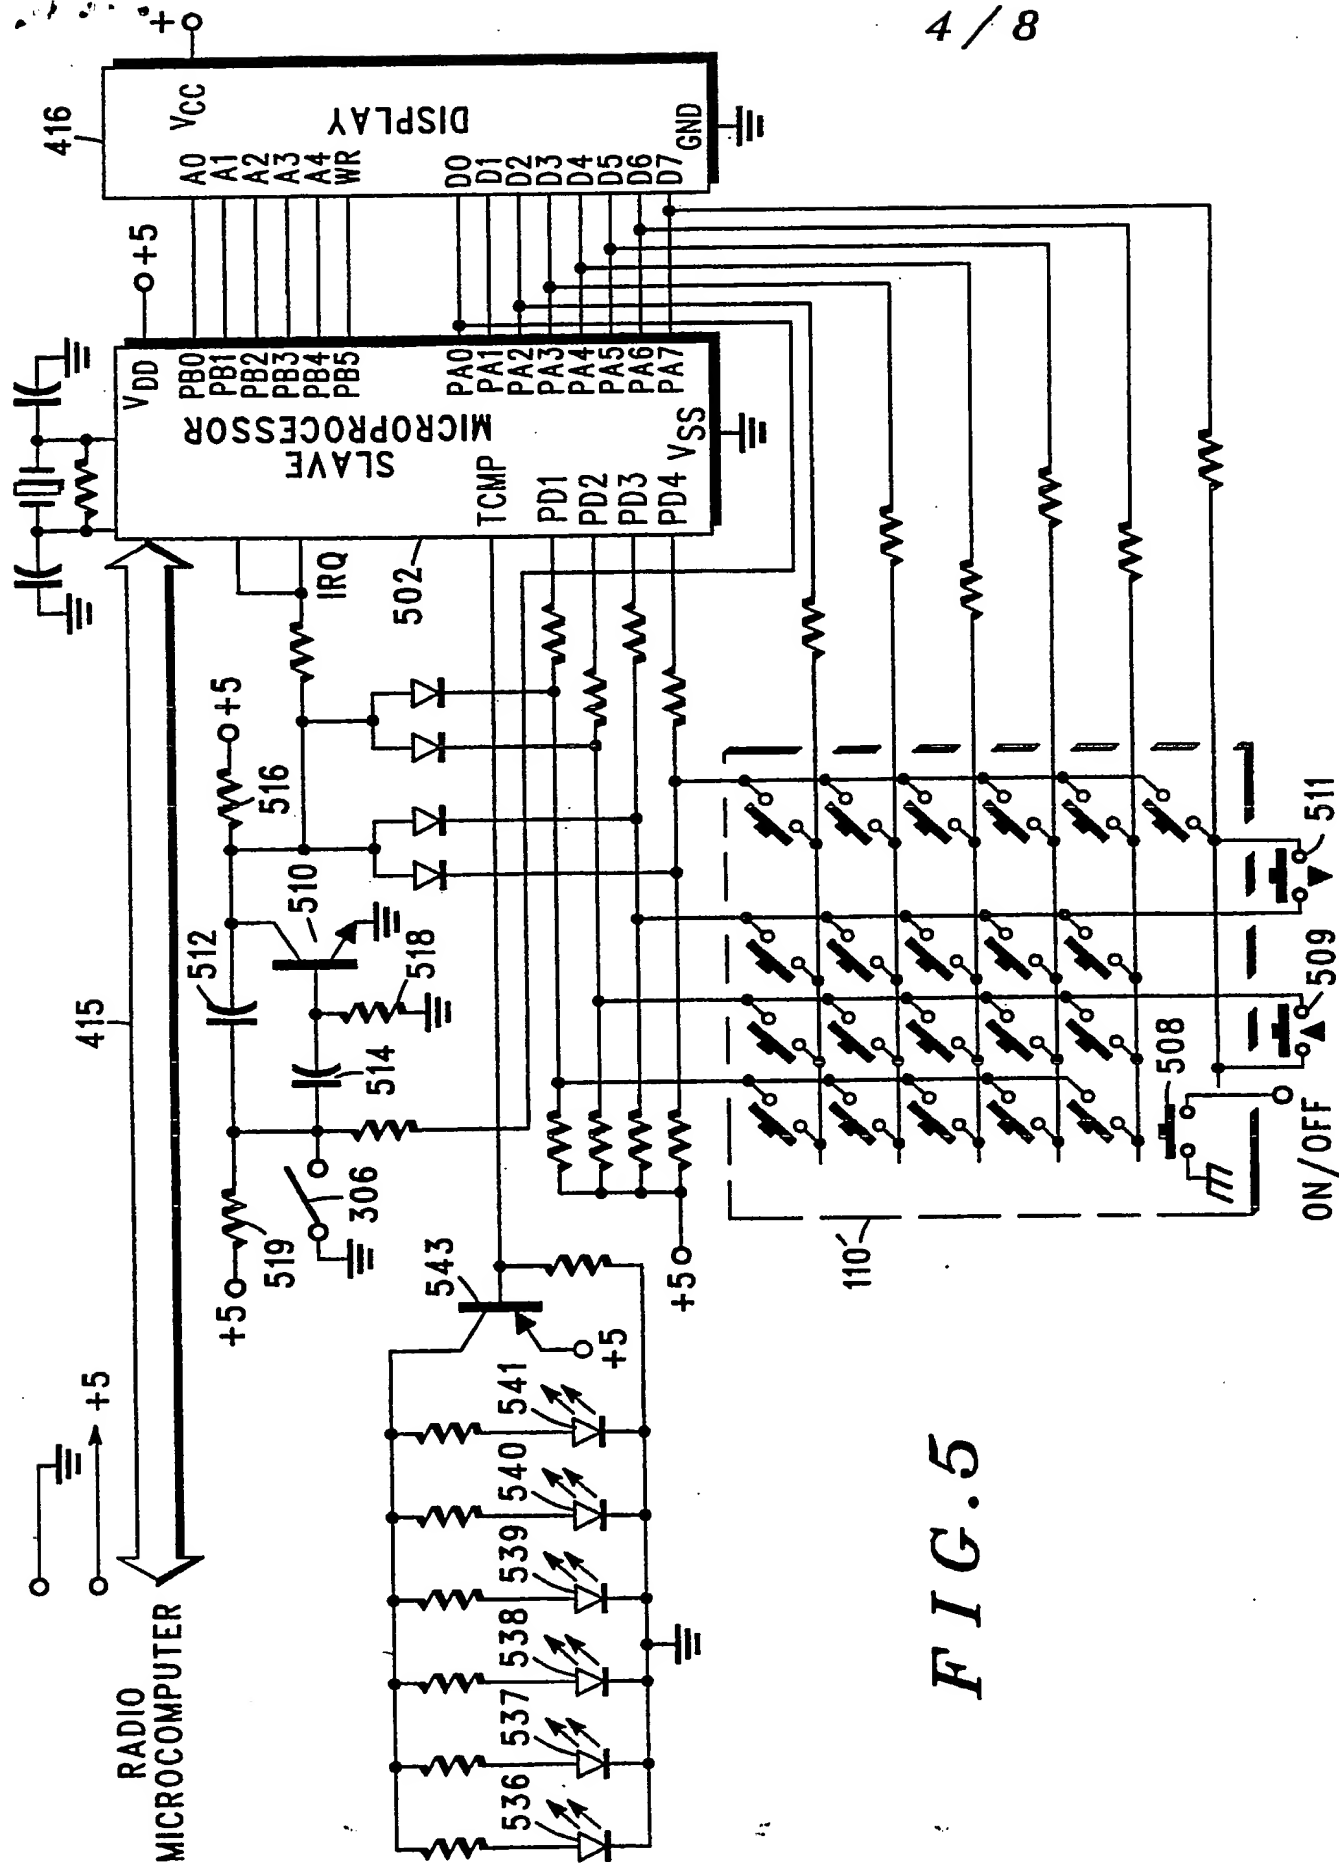


FIG. 5

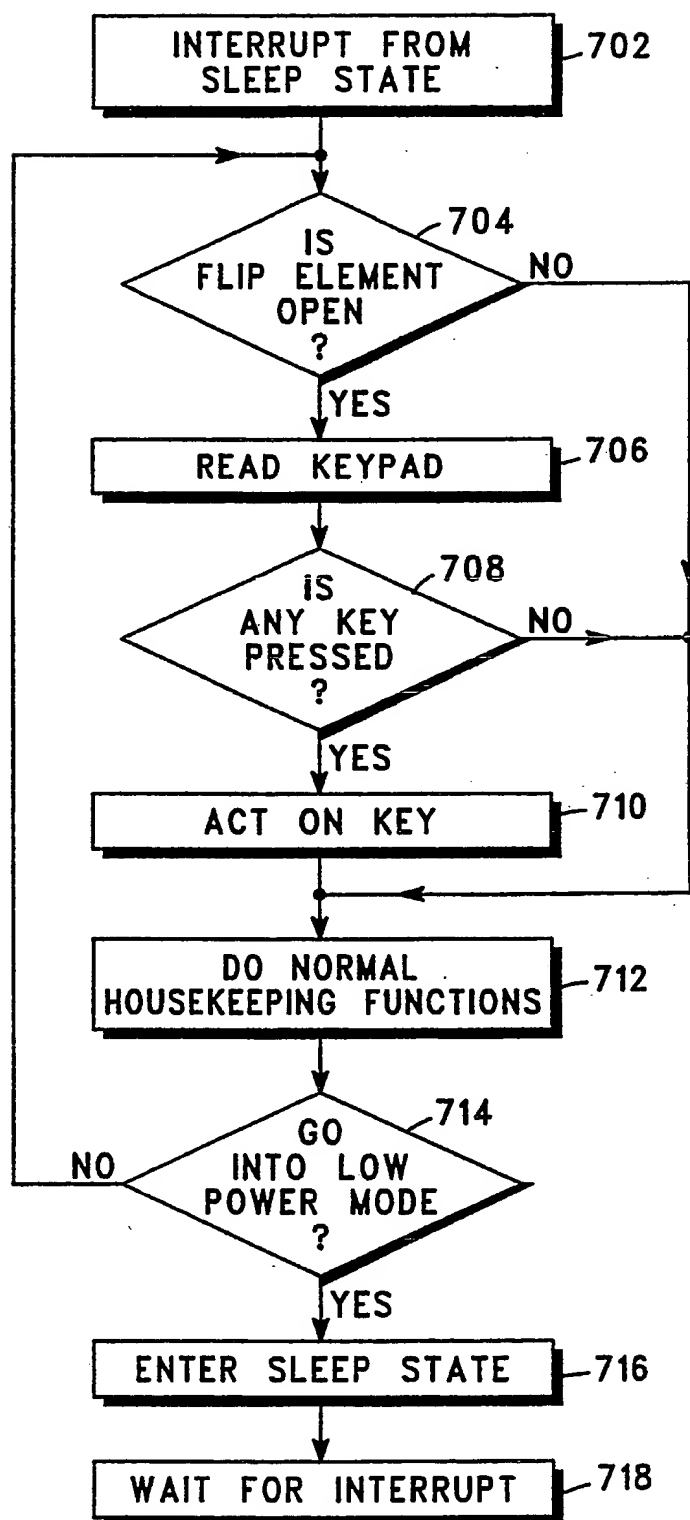
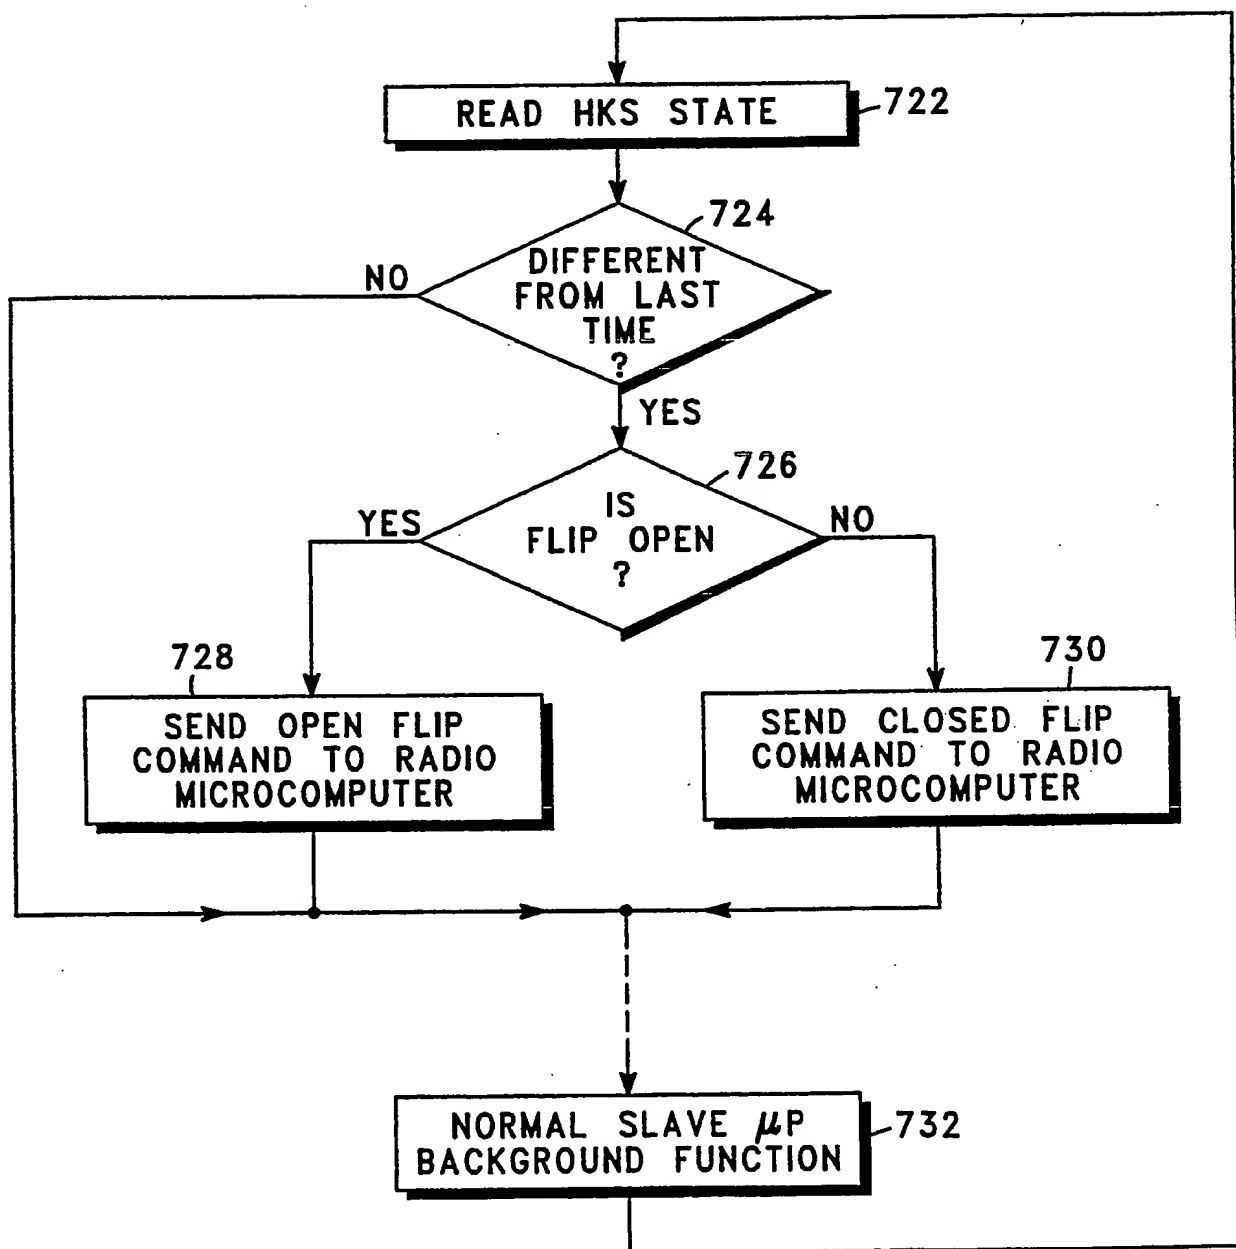
*FIG. 7 A*

FIG. 7 B

7 / 8


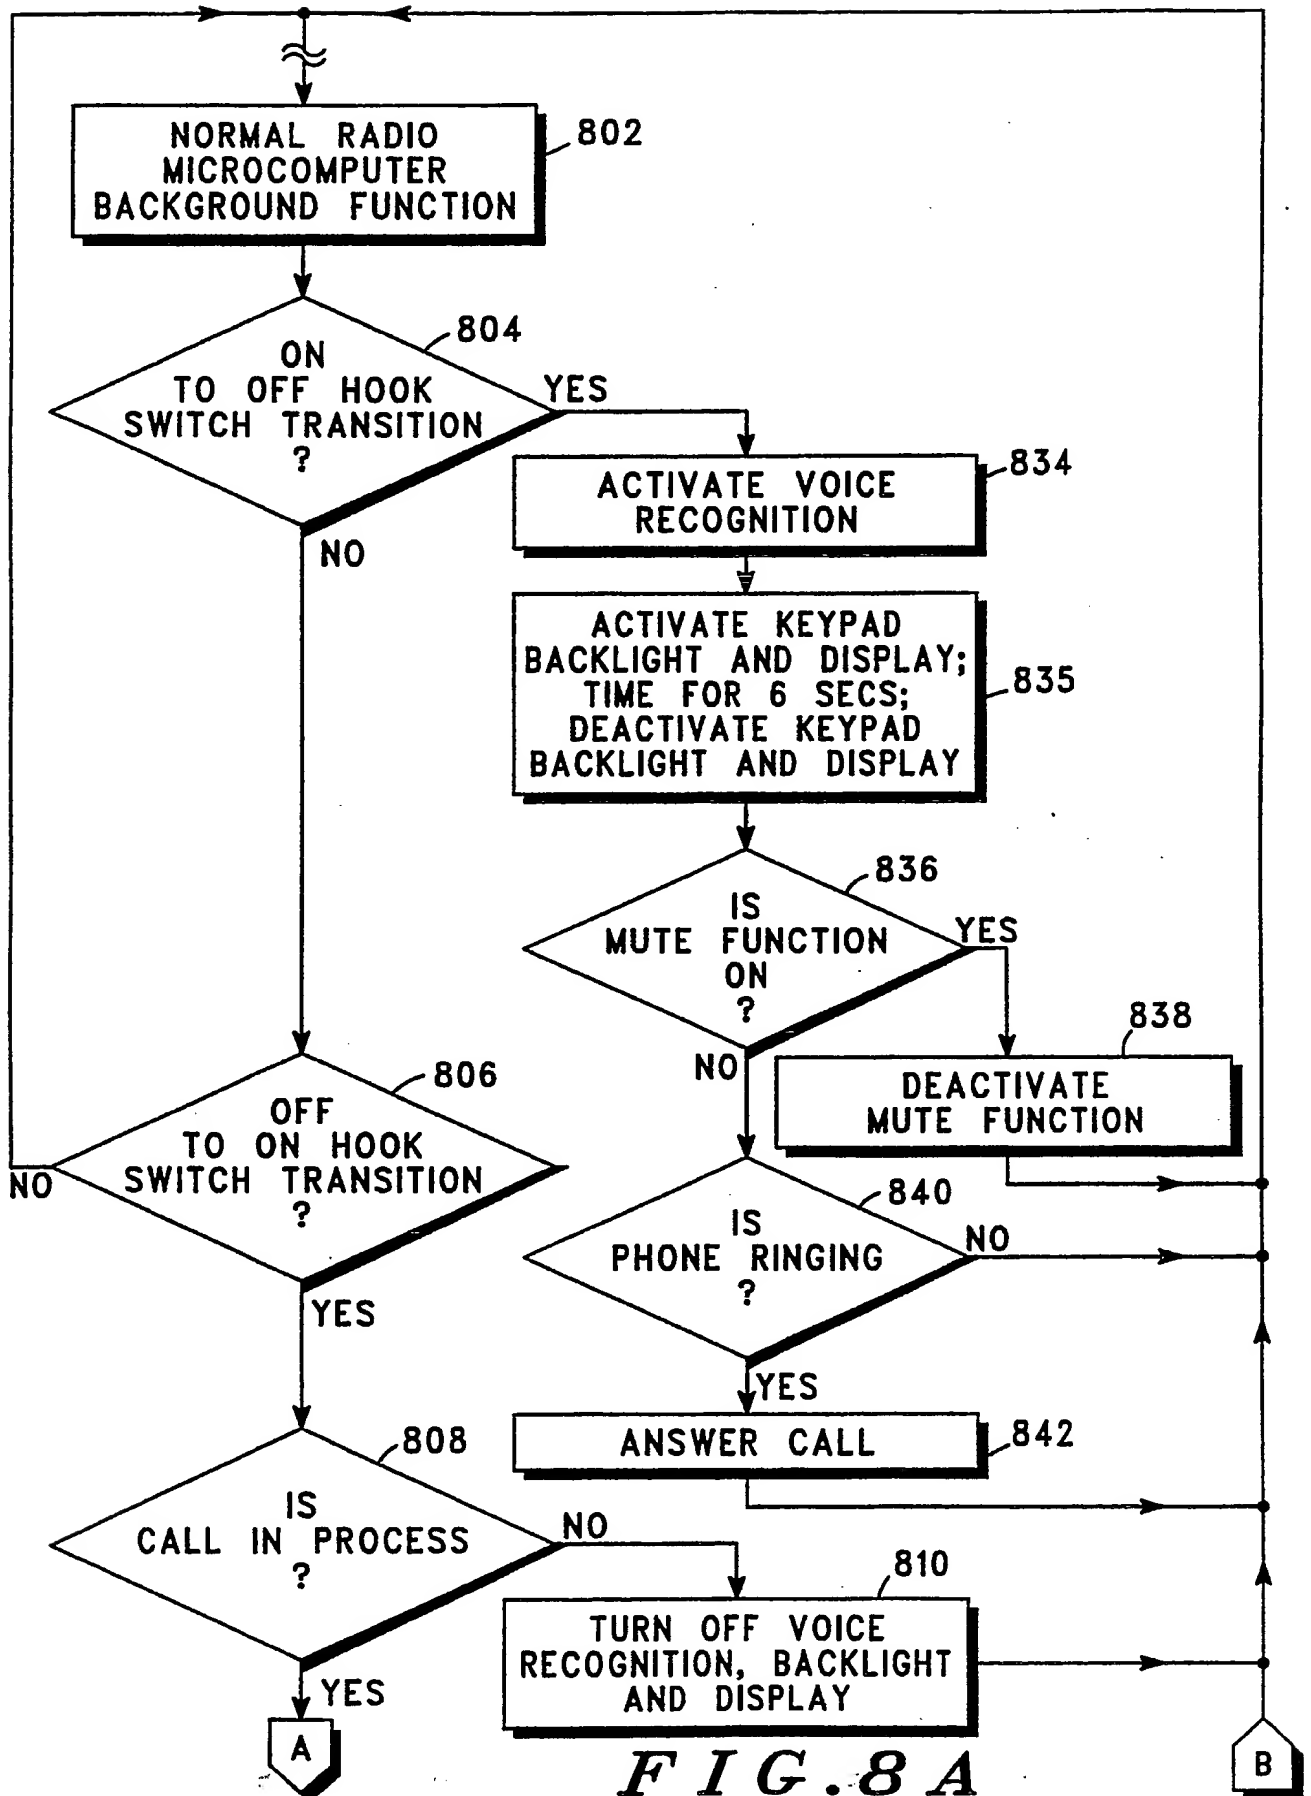


FIG. 8A

8 / 8

FIG. 8B

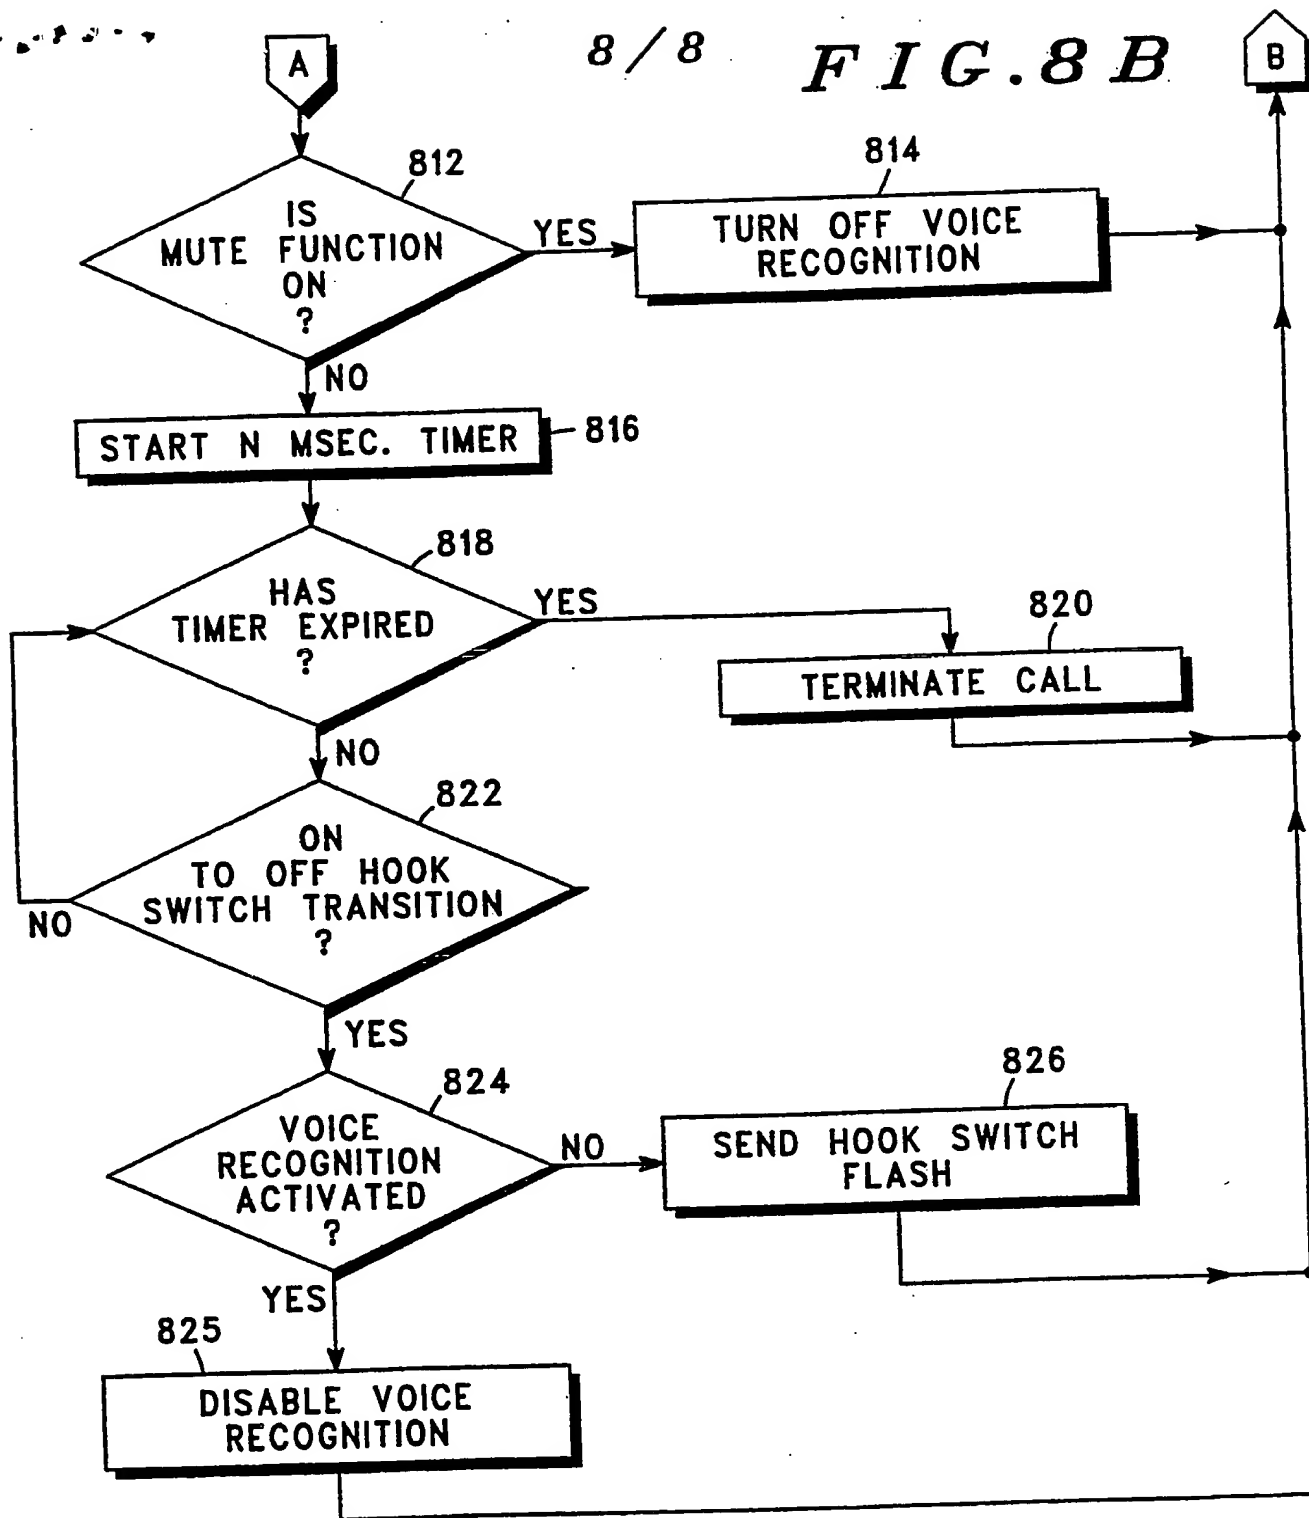

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US90/05223

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ¹

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5) : H04M 11/00

U.S. Cl : 379/58

II. FIELDS SEARCHED

Minimum Documentation Searched ⁴

Classification System

Classification Symbols

U.S.

379/43, 58, 63, 88, 190, 193, 393, 433

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched ⁵

III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴

Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
A	US,A 3,476,866 (FERRARI ET AL) 04 November 1969	4,5,6,8-15
A	US,A 3,551,607 (TOMMASI ET AL) 29 December 1970	4-6,8-15
A	US,A 4,348,550 (PIRZ ET AL) 07 September 1982	1-15
Y	US,A 4,737,976 (BORTH ET AL) 12 April 1988 See Column 1, Line 6 to Column 2, Line 13; Column 3, Lines 40-65.	1-15
Y	US,A 4,845,772 (METROKA ET AL) 04 July 1989 See Column 1, Lines 16-48; Column 2, Lines 1-10; Column 1, Line 59 to Column 2, Line 9. (con't)	4-6,8-15

* Special categories of cited documents: ¹⁵

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search ²

20 DECEMBER 1990

Date of Mailing of this International Search Report ³

05 FEB 1991

International Searching Authority ¹

ISA/US

Signature of Authorized Officer ¹⁹

WILLIAM CUMMING

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, ^{1a} with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No ¹⁸
X	US,A 4,959,850 (MARUI) 25 September 1990 See Column 9, Lines 23-26; Column 9, Lines 59-61.	1-3
Y	Knowles Electronics Inc. BW-1789 Application Notes 01 May 1974	7
A	Realistic Duofone ET-415 Cat. # 43-555	4-6,8-15

BLANK PAGE